






Panel hanging systems on cables

Short Description

- Top and bottom support brackets attach panels to vertical cables
- Use in pairs to hang one end of an upright wall panel. Repeat at the other end
- Use bottom brackets with four drop wires to support a horizontal shelf or similar
- All brackets incorporate cable grippers with finger-tip release for fine height adjustment

Product Images

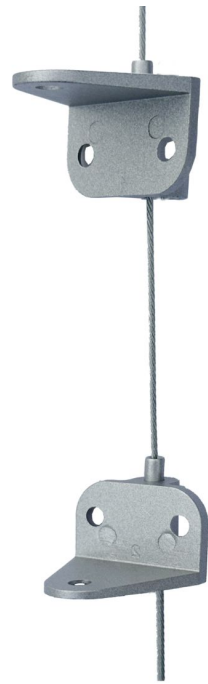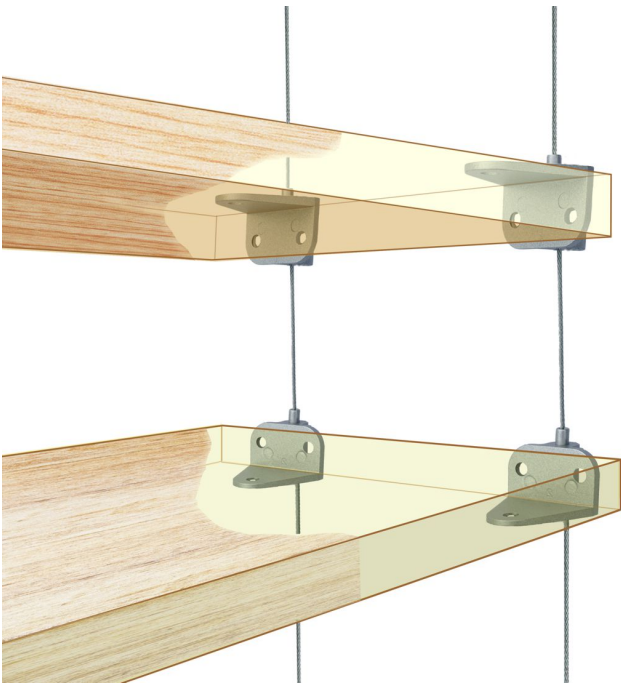

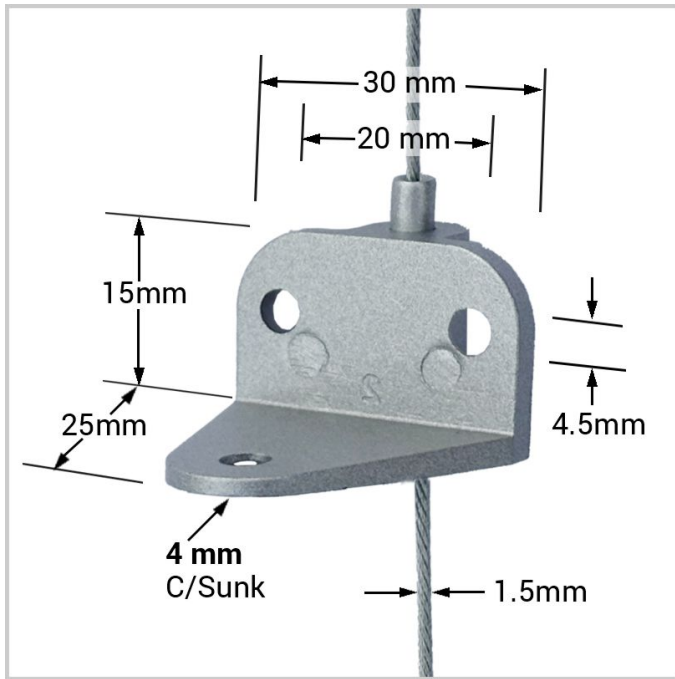

Description

Brackets for panel hanging systems from cables

Wall panel hanging from vertical cables offers a versatile solution for many situations. Top and bottom support brackets are screwed onto panels, shelves or soffits for attaching to pre-installed drop wires. Panels must be receptive to screw fixing from the edge and/or the top/bottom.

The small yet strong hanging brackets incorporate powerful cable grippers to lock onto the wire, with a finger release button to facilitate fine adjustment on site. Top and bottom brackets are handed vertically - meaning the height adjustment buttons always face upwards. The fittings are designed to work best with 1.5mm diameter wire rope (7x7 steel).

- Panel hanging systems suit upright panels spaced away from a wall or window
- Panels can also be hung in the middle of a space, e.g. as an acoustic baffle or room divider
- Shelves can be supported from wires when bottom brackets are used as shelf hanging hardware
- Top brackets can also be used for suspended grids or eggcrate ceilings
- Top and bottom brackets are sold singly so you can order any combination as required
- Hanging wires are sold separately: floor-to-ceiling tensioned cables provide stability to the bottom of larger panels. See below.

The brackets are made from alloy castings with satin silver finish. Each fitting can support 10kg with a large margin of safety. With four fittings we recommend the display panel or shelf weight is limited to 25kg. Ensure the top cable fixings will support the requisite load, which will be influenced by the type of ceiling and anchor fixings selected for the project.

Product Dimensions	See Dimnsions Drawing in the image gallery.
Assembly and Installation	Use two or three 4mm screws to attach each bracket to the panel. Ensure brackets are aligned accurately.
Delivery and Returns	<ul style="list-style-type: none">• We offer a choice of delivery options tailored to the goods selected and your location, calculated for you automatically in the Checkout. When feasible, you will be offered options for Free, Economy or Next Day delivery.• Any product returned by the purchaser must be unused and in its original packaging, which should be unmarked. If goods are received damaged or faulty we will take care of the problem.• For detailed information about Delivery charges or Returns and refund policies, please click on the links below.
Include in Google Feed	Yes
Postable	No
Small parcel	No
Oversize	No

