




---

## Magnetic anchor with cable gripper

### Short Description

---

- Powerful magnet attaches your hanging wire to a magnetically receptive ceiling or beam
- Magnetic anchor incorporates a wire gripper mechanism, with spring release button
- Neodymium magnet reliably supports 3kg (with safety margin)

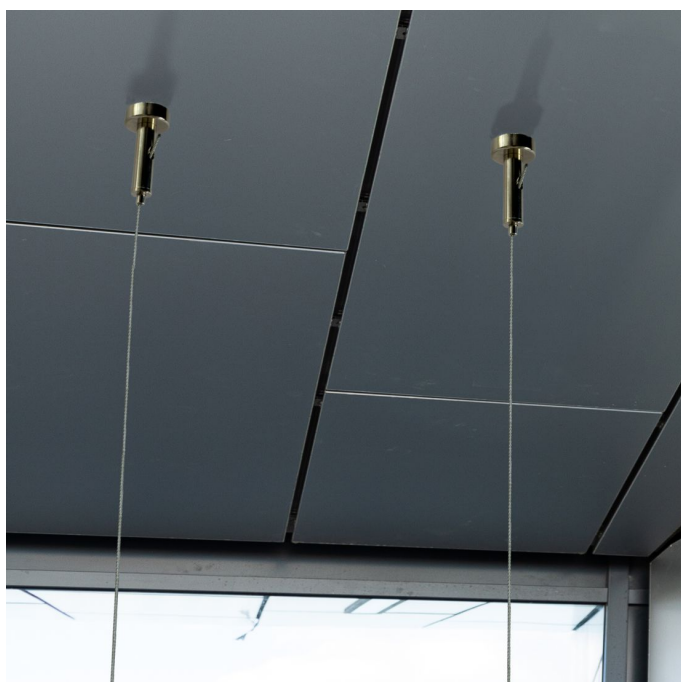

## Description

---

### Magnetic anchor attaches wires to magnet receptive surfaces

Magnetic cable anchor offers rapid and secure attachment of wire rope to metal ceilings, warehouse racking, beams and girders. The strong 20mm diameter neodymium magnet supports a 3kg load with a 2:1 margin of safety (see More Information for restrictions).

- Very fast installation of drop wires in all kinds of spaces.

- Hanging with magnets is convenient and avoids drilling and similar operations.
- Magnets are ideal for lighting showrooms where light fittings on display may need to be re-arranged or removed frequently.
- The integral wire gripper grabs onto 1-2mm diameter wire rope. 1.5mm wire thickness with 7x7 construction is optimum.
- Spring-loaded release button allows for height adjustment, or cable removal.
- Smart nickel plated finish and professional neat appearance.
- Magnet cable attachment works on ferrous materials such as iron or sheet steel.

We also offer other magnetic suspension sets including wire, hooks and panel grippers. See below. This product is specially for customers who have their own wire but want to avoid tedious crimping or other time consuming site procedures. We offer [good value reels of 1.5mm steel wire rope](#).

## Additional Information

More Information	<ul style="list-style-type: none"><li>• Magnetic power is dependent on the surface to which the magnetic hanger is to be attached.</li><li>• Steel beams or heavy girders offer the best magnetic power.</li><li>• Very thin sheet steel or thickly painted surfaces can significantly reduce the theoretical suspension load.</li><li>• For attachment to suspended ceiling grids please consider other non-magnetic options which we offer on this website.</li><li>• Aluminium and some stainless steel surfaces are not receptive to magnets. Please test with a fridge magnet (or any magnet you have to hand) before ordering this product.</li><li>• When suspending larger items use at least 2 magnetic hangers. This also makes levelling up easier.</li></ul>
Product Dimensions	<p>The diameter of the round magnet is 20mm The overall length of the assembly is 45mm Acceptable wire rope size: 1mm up to 2mm diameter. 1.5mm is optimum for grip and ease of insertion.</p>
Assembly and Installation	<ul style="list-style-type: none"><li>• It is important to use a cable which has been cut cleanly, with <a href="#">good quality wire cutters</a>.</li><li>• Simply insert the correct size fray-free wire rope into the gripper fitting. Push it through as far as required.</li><li>• To lower or release the cable, depress the cable-entry button. This releases the strong internal clutch mechanism. When finger pressure is removed, the fitting grabs the cable once again.</li></ul>
Delivery and Returns	<ul style="list-style-type: none"><li>• We offer a choice of delivery options tailored to the goods selected and your location, calculated for you automatically in the Checkout. When feasible, you will be offered options for Free, Economy or Next Day delivery.</li><li>• Any product returned by the purchaser must be unused and in its original packaging, which should be unmarked. If goods are received damaged or faulty we will take care of the problem.</li><li>• For detailed information about Delivery charges or Returns and refund policies, please click on the links below.</li></ul>
Include in Google Feed	Yes
Postable	No
Small parcel	No
Oversize	No

